


# HIGH SPEED SPINDLES

Frequency converters

## Model type CDA (for instalation)

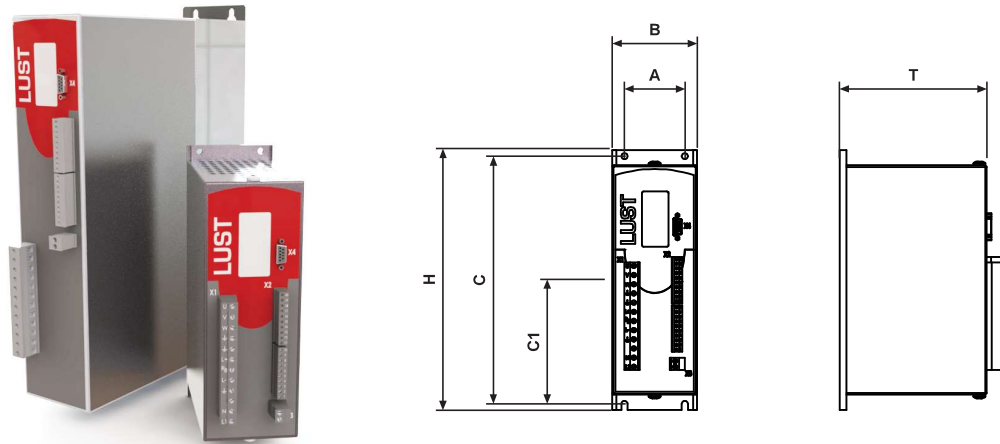

Converter model	CDA-0,75-1	CDA-1,5-1	CDA-3,0-3	CDA-5,5-3
Voltage input	1-phase 50/60 Hz 230 V	1-phase 50/60 Hz 230 V	3-phase 50/60 Hz 400 V	3-phase 50/60 Hz 400 V
Output effect, max	750 W	1 500 W	3 000 W	5 500 W
Frequency range	0 - 1500 Hz	0 - 1500 Hz	0 - 1500 Hz	0 - 1500 Hz
Voltage output	3-phase 0 - 220 V	3-phase 0 - 220 V	3-phase 0 - 380 V	3-phase 0 - 380 V
Dimensions A	50 mm	50 mm	40 mm	135 mm
B	70 mm	70 mm	70 mm	150 mm
C	205 mm	230 mm	320 mm	200 mm
C1	---	---	---	100 mm
H	215 mm	240 mm	330 mm	300 mm
T	120 mm	145 mm	150 mm	150 mm
Mounting screws	4 x M4	4 x M4	6 x M5	6 x M5
Weight	1,6 kg	2,3 kg	3,2 kg	5,2 kg

### Control Box

By using our Control Box you get the chance for easy handling of start / stop, continuous control of speed and a display which shows the set RPM. There is also a possibility to purchase the components contained for operation



### Key Pad

By using a Key Pad KP 300 you can easily change program and adjust the parameter settings for the CDA converters. All data can be saved and downloaded to a SmartCard. (Not included).

